


# Positioning Measurement System



Technical Information

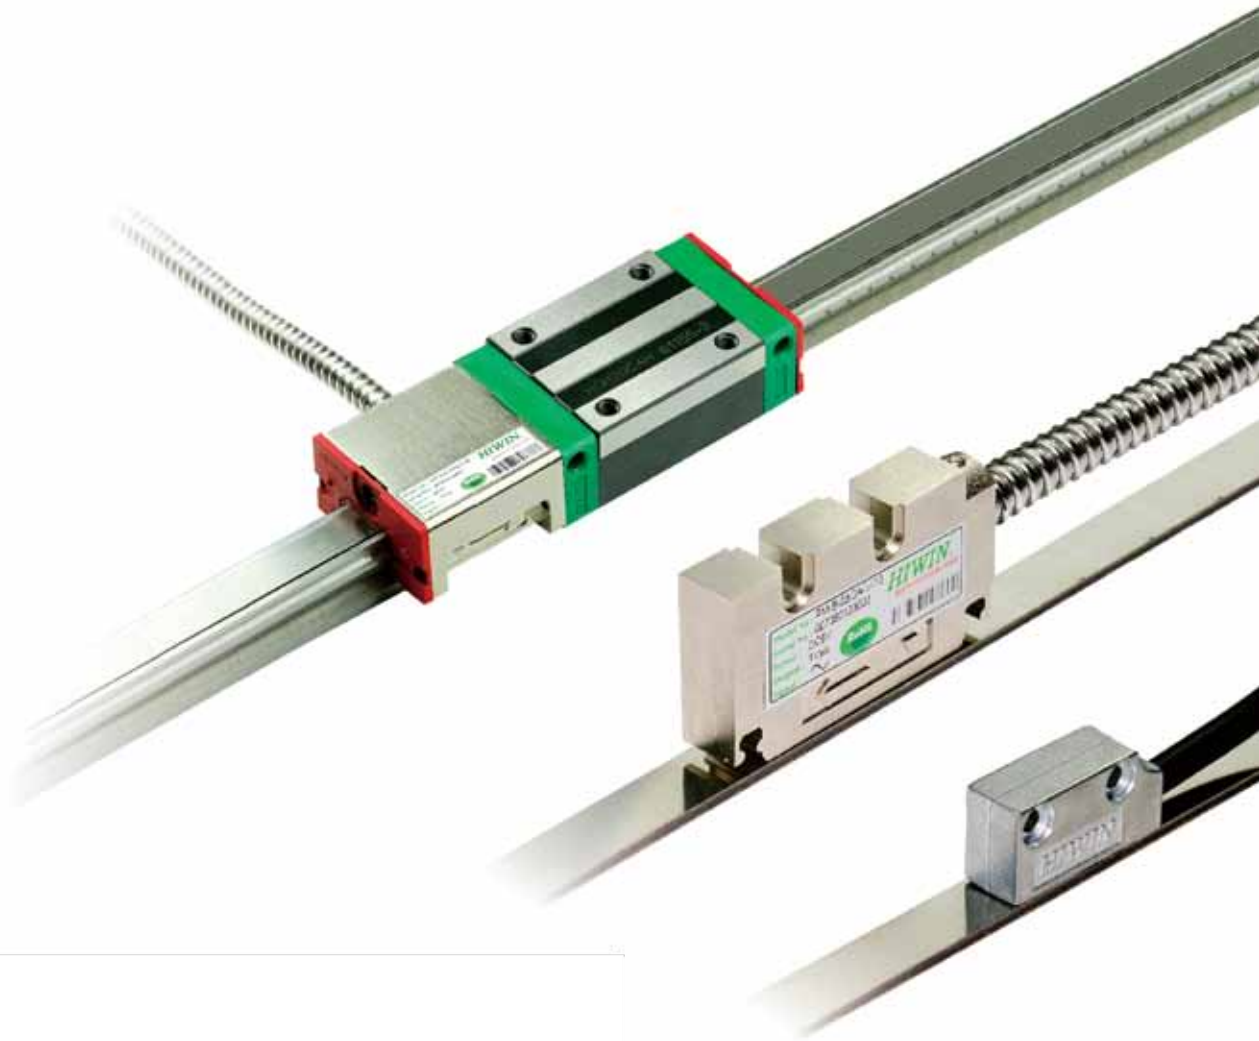

TAIWAN EXCELLENCE  
GOLD AWARD 2013

### Crossed Roller Bearings



TAIWAN EXCELLENCE  
SILVER AWARD 2006

### Torque Motor Direct drive Motor



TAIWAN EXCELLENCE  
GOLD AWARD 2012, 2011, 2009,  
2008, 2005  
SILVER AWARD 2006, 2001, 1993



### Ballscrews

Ground/Rolled

- High Speed (High Dm-N Value/Super S Series)
- For Heavy-Load Drive
- Ecological & Economical lubrication Module E2
- Rotating Nut (R1)
- Energy-Saving & Thermal-Controlling (C1)
- Recirculation Divide Series



### AC Servo Motors AC Servo Drives



TAIWAN EXCELLENCE  
GOLD AWARD 2004

### Linear Motor

- Coreless Type (LMC)



TAIWAN EXCELLENCE 2002

### Linear Actuator

- LAN for Hospital
- LAM for Industrial
- LAS Compact Size
- LAK Controller



TAIWAN EXCELLENCE  
GOLD AWARD 2010, 2003


### Industrial Robot

- For Semiconductor & Electronic (KK Series)
- For Automation (KS, KA Series)



TAIWAN EXCELLENCE  
SILVER AWARD 2009

### Linear Motor Air Bearing Platform




TAIWAN EXCELLENCE  
GOLD AWARD 2008  
SILVER AWARD 2007, 2002

### Linear Guideway




HG/EG/RG/MG Type


- Ecological & Economical lubrication Module E2
- Low Noise (Q1)
- Air Jet (A1)





### Positioning Measurement System



TAIWAN EXCELLENCE 2004  
Positioning Guideway

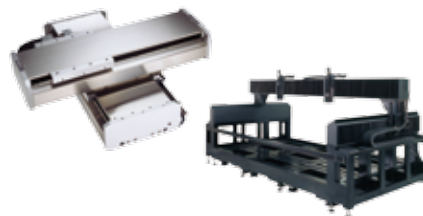

### Linear Motor X-Y Robot Linear Motor Gantry

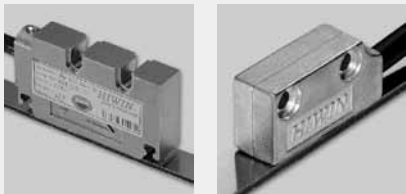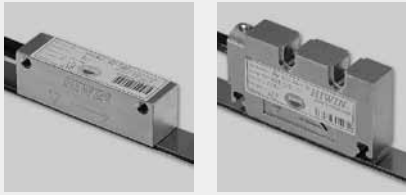

## I. 1mm High Resolution Position Measurement System

1. 1mm Positioning Scale .....	1
2. Positioning Measurement - Tiny Type .....	2
3. Positioning Measurement - Standard Type .....	4
4. Positioning Measurement - Vertical Type .....	6
5. Positioning Measurement - PG Type .....	8
6. 1mm Signal Translator .....	10
7. Cable Color and Pin Assignment .....	12
8. Output Signal Definition .....	13
9. Signal Translator Pin Assignment .....	15

## II. 5mm High Resolution Position Measurement System

10. 5mm Positioning Scale .....	16
11. Positioning Measurement - Vertical Type .....	17
12. Positioning Measurement - E Type .....	20
13. Positioning Measurement - H Type .....	22
14. 5mm Signal Translator .....	23
15. Output Signal and Application .....	25

## III. Display and Counter

16. LCD Counter System .....	26
17. High Efficiency Single Axis Counter .....	28
18. Multi-axis Counter .....	31
19. High Efficiency Multi-axis Counter .....	33













## IV. Accessories








20. Signal Transfer Cable .....	35
21. Positioning Scale Installation Fixture .....	35
22. Lateral Fixture .....	35


## V. Customer's Requirements(PM)

Customer's Requirements(PM) .....	36
-----------------------------------	----









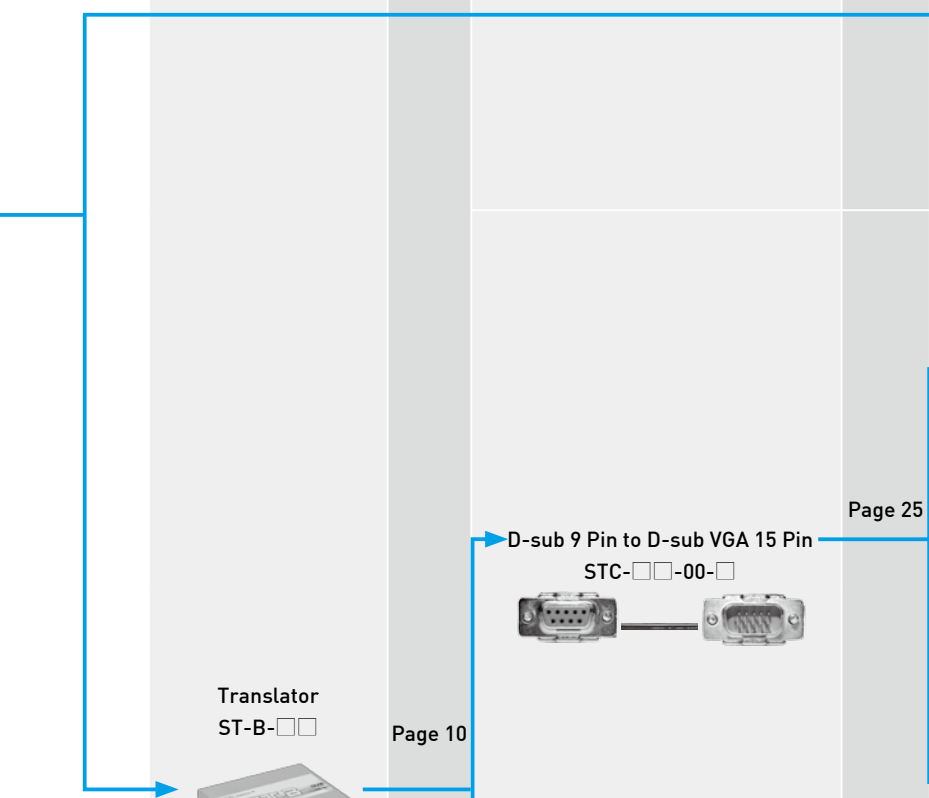



### The Component Breakdown of the Positioning Measurement System - 1mm Placement Figure (Analog)












Pole Pitch	Refer Page	Resolution	Encoder Type	Refer Page	Signal	Type of Connector	Refer Page
1mm PS-B-□□□□□ 	Page 1	1μm	T Type PM-B-□□-□A-T-□□ 	Page 2	Analog	Flying Lead 	Page 12
			Standard Type PM-B-□□-□A-S-□□ 	Page 4		D-sub VGA 15 Pin 	
			Vertical Type PM-B-□□-□A-V-□□ 	Page 6		D-sub 15 Pin 	
			PG Type PM-B-□□-□A-G-□□-□□ 	Page 8		17 Pin Circular Plug 	
						SCSI 14 Pin 	
						SCSI 14 Pin (with screw) 	
						SCSI 20 Pin 	

Translator	Refer Page	Trunk Connector	Refer Page	Counter/Display Application	Refer Page
 <p>Translator ST-B-□□</p>	<p>Page 10</p>	<p>D-sub 9 Pin to D-sub VGA 15 Pin STC-□□-00-□</p> 	<p>Page 25</p>	<p>High Efficiency Single Axis Counter PMED-H1-1-00-□</p>  <p>High Efficiency Multi-axis Counter PMED-S4-□-□</p>  <p>Multi-axis Counter PMED-S3-□-□</p>  <p>PLC or Driver</p>  <p>Linear Motors (HIWIN LM)</p> 	<p>Page 28</p> <p>Page 33</p> <p>Page 31</p>









### The Component Breakdown of the Positioning Measurement System - 1mm Placement Figure (Digital)








Pole Pitch	Refer Page	Resolution	Encoder Type	Refer Page	Signal	Type of Connector	Refer Page
1mm PS-B-□□□□□ 	Page 1	1μm	T Type PM-B-□□-□D-T-□□ 	Page 2	Digital	Flying Lead 	
			Standard Type PM-B-□□-□D-S-□□ 	Page 4		D-sub VGA 15 Pin 	
			Vertical Type PM-B-□□-□D-V-□□ 	Page 6		D-sub 15 Pin 	
			PG Type PM-B-□□-□D-G-□□-□□ 	Page 8		17 Pin Circular Plug 	Page 12
						SCSI 14 Pin 	
		SCSI 14 Pin (with screw) 					
		SCSI 20 Pin 					

	Counter/Display Application	Refer Page
	<p>PLC or Driver</p> 	
	<p>High Efficiency Single Axis Counter</p> <p>PMED-H1-1-00-□</p> 	Page 28
	<p>High Efficiency Multi-axis Counter</p> <p>PMED-S4-□-□</p> 	Page 33
	<p>Multi-axis Counter</p> <p>PMED-S3-□-□</p> 	Page 31
	<p>Hiwin Drive</p>  <p>Linear Motors (HIWIN LM)</p> 	







### The Component Breakdown of the Positioning Measurement System - 5mm Placement Figure (Analog)











Pole Pitch	Refer Page	Resolution	Encoder Type	Refer Page	Signal	Type of Connector	Refer Page
5mm PS-A-□□□□□□ 	Page 16	5µm	E Type PM-A-□□-□A-E-00 	Page 20	Analog	D-sub VGA 15 Pin 	Page 12
			H Type PM-A-□□-□A-H-□□ 			SCSI 14 Pin 	
			SCSI 14 Pin (with screw) 				



Translator	Refer Page	Trunk Connector	Refer Page	Counter/Display Application	Refer Page
				LCD Counter System PMLD-A-□□-□-□□ 	Page 26
				High Efficiency Single Axis Counter PMED-H1-1-A1-□ 	Page 28
Translator ST-A-□□ 	Page 23	D-sub 9 Pin to D-sub VGA 15 Pin STC-□□-00-□ 	Page 25	High Efficiency Multi-axis Counter PMED-S4-□-□ 	Page 33
				Multi-axis Counter PMED-S3-□-□ 	Page 31
				PLC or Driver 	

The Component Breakdown of the Positioning Measurement System - 5mm Placement Figure (Digital)


Pole Pitch	Refer Page	Resolution	Encoder Type	Refer Page	Signal	Type of Connector	Refer Page
<p>5mm PS-A-□□□□□</p> 	Page 16	5μm	<p>Vertical Type PM-A-□□-□D-V-□□</p> 	Page 17	Digital	<p>Flying Lead</p>  <p>D-sub VGA 15 Pin</p>  <p>D-sub 15 Pin</p>  <p>SCSI 20 Pin</p> 	Page 12

	Counter/Display Application	Refer Page
	<p>PLC or Driver</p> 	
	<p>High Efficiency Multi-axis Counter PMED-S4-□-□</p> 	Page 33
	<p>Multi-axis Counter PMED-S3-□-□</p> 	Page 31
	<p>High Efficiency Single Axis Counter PMED-H1-1-00-□</p> 	Page 28
	<p>HIWIN Drive</p> 	



# I. 1mm High Resolution Position Measurement System

## 1. 1mm Positioning Scale

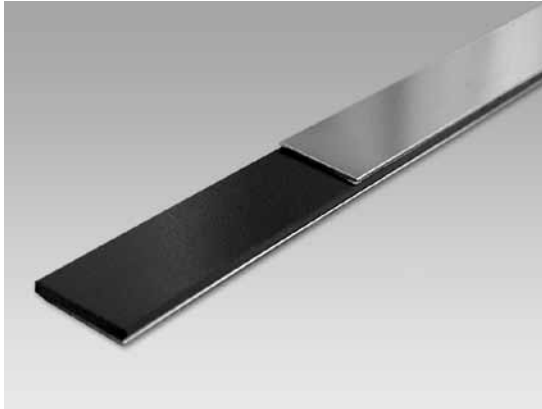

### Features:

- Compatible with various measurement instruments to achieve different accuracy requirements.
- Magnetic scale can maintain performance under severe ambient conditions caused by oil, water or dust to gain required accuracy and signal feedback.

### 1.1 Specifications:


Accuracy	$\pm 20\mu\text{m}/\text{m}$
Pitch	1mm
Width	10mm (+0.2mm~0mm)
Thickness	1.9mm $\pm$ 0.1mm
Max scale length	24m
Linear expansion coefficient	$(11\pm 1)\times 10^{-6}\text{m}/\text{K}$
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67

### 1.2 Ordering Code:

PS - B - XXXXX

PS: Positioning Scale  
 XXXXX: Scale length (Unit: mm)  
 B: Pole pitch (1mm)

### 1.3 Dimensions:

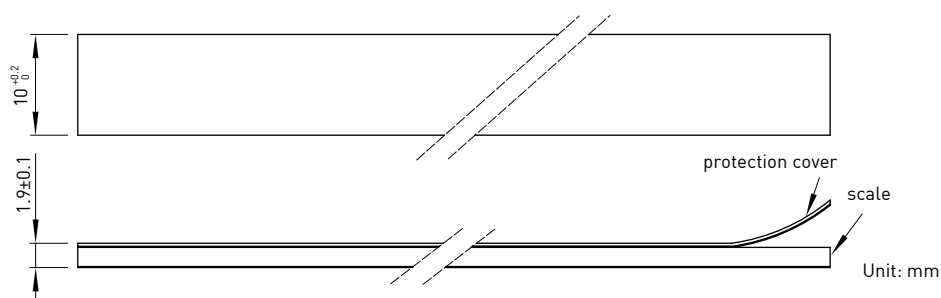

#### Caution!

1. Magnetic scale consists of magnetic substance and should be kept away from strong magnetic field during installation to prevent a malfunction.
2. Please leave the magnetic field strength 5000 gauss at least 5cm, to prevent the position measurement system from disruption.

## 2. Positioning Measurement - Tiny Type




### Features:

- Tiny shape
- Digital or analog output available
- Simple design and easy-mounting
- Same installation holes as other optical encoders, easy to switch and replace



### 2.1 Specifications:

Signal resolution	analog: 1mm digital: 1 $\mu$ m
Repeatability	analog: $\pm 3\mu$ m digital: $\pm 2\mu$ m
Reference signal	1mm/pulse
Output signal	analog: SIN/COS 1Vp-p digital: 5V RS422/TTL
Max travel speed	analog: 10m/sec digital: 5m/sec
Input power	5VDC $\pm 5\%$
Operating temperature	0 $^{\circ}$ C~50 $^{\circ}$ C
Storage temperature	-5 $^{\circ}$ C~70 $^{\circ}$ C
Protection class	IP67

## 2.2 Ordering Code:

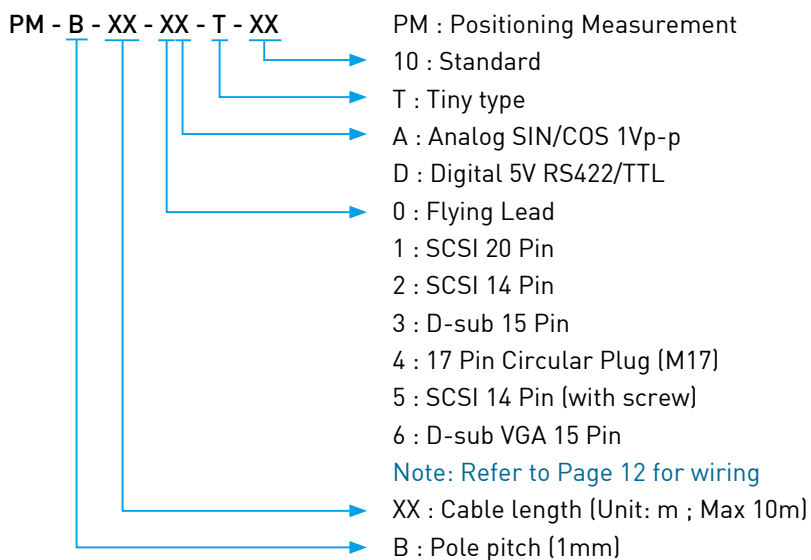

## 2.3 Dimensions:

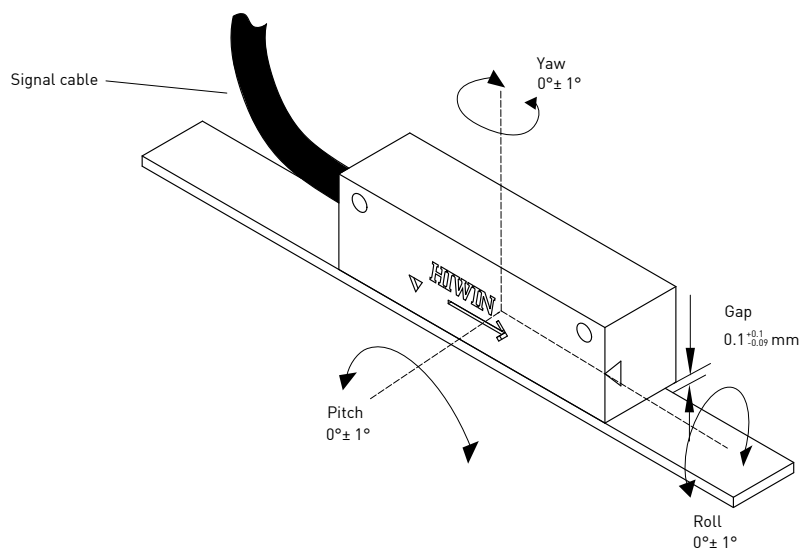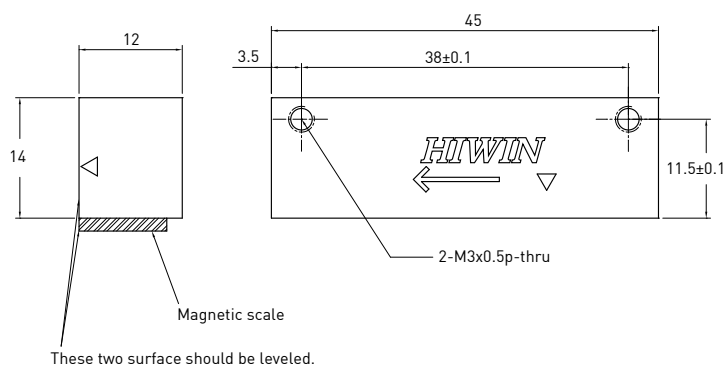

Unit: mm

### 3. Positioning Measurement - Standard Type



#### Features:


- Digital or analog signal output available
- Simple design and easy-mounting
- Same installation holes as other optical encoders, easy to switch and replace
- Waterproof and dustproof
- Optional metal protection tube

#### 3.1 Specifications:


Signal resolution	analog: 1mm digital: 1 $\mu$ m
Repeatability	analog: $\pm 3\mu$ m digital: $\pm 2\mu$ m
Reference signal	1mm/pulse
Output signal	analog: SIN/COS 1Vp-p digital: 5V RS422/TTL
Max travel speed	analog: 10m/sec digital: 5m/sec
Input power	5VDC $\pm 5\%$
Operating temperature	0 $^{\circ}$ C~50 $^{\circ}$ C
Storage temperature	-5 $^{\circ}$ C~70 $^{\circ}$ C
Protection class	IP67




### 3.2 Ordering Code:

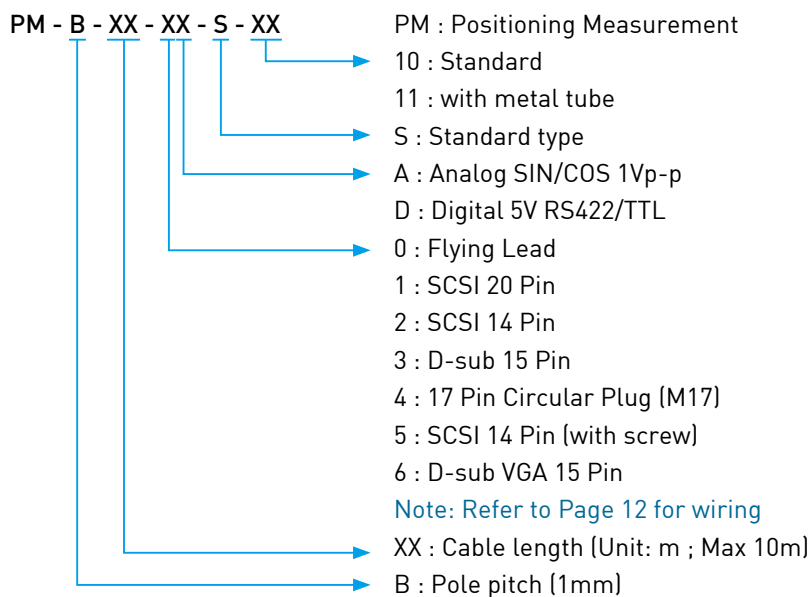

### 3.3 Dimensions:

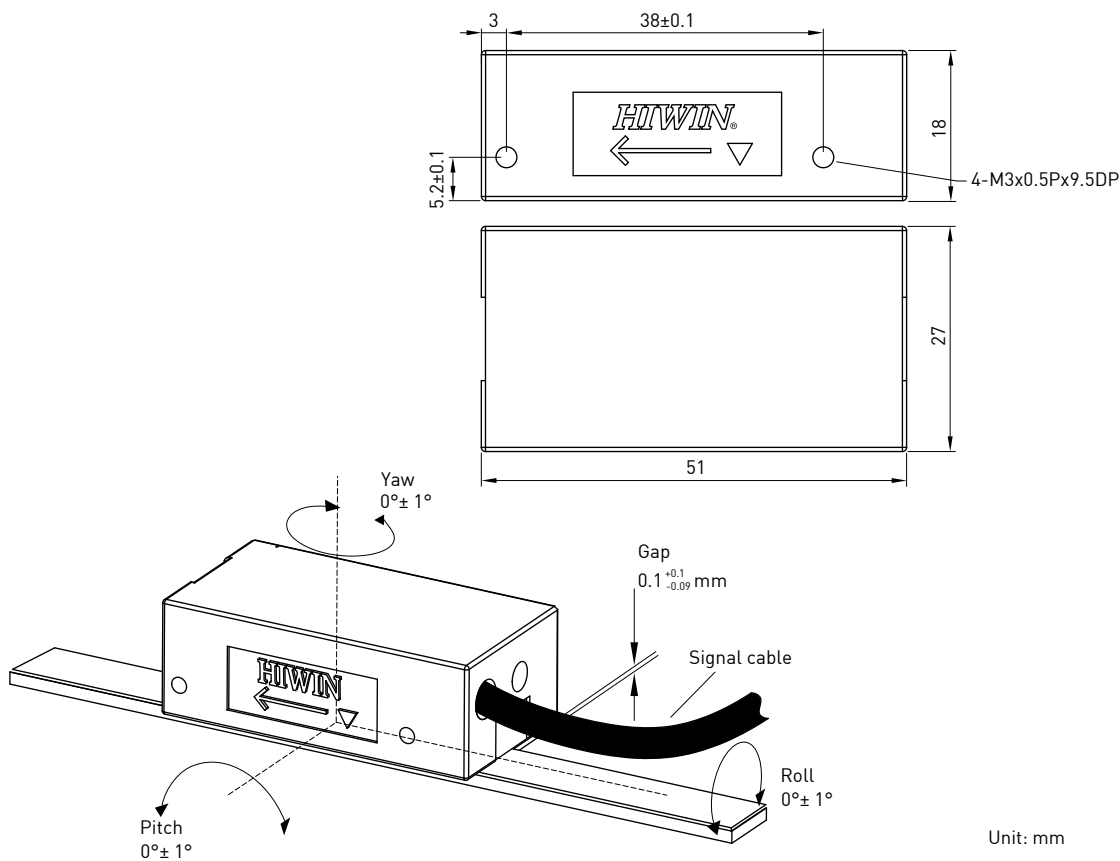

## 4. Positioning Measurement - Vertical Type

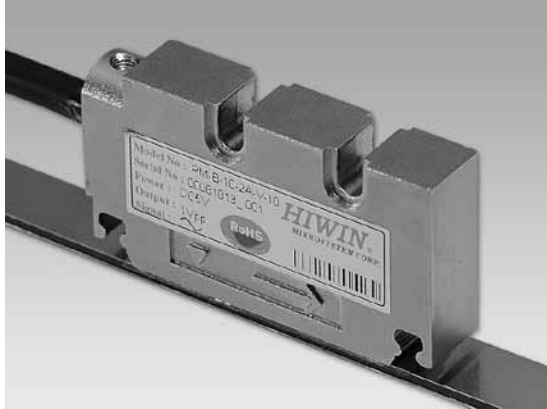

### Features:

- Digital or Analog signal output available
- Vertical shape, optimal for space-saving applications
- Optional metal protection tube

### 4.1 Specifications:

Signal resolution	analog: 1mm digital: 1 $\mu$ m
Repeatability	analog: $\pm 3\mu$ m digital: $\pm 2\mu$ m
Reference signal	analog: 2mm/pulse (Amplitude: 10Vp-p) digital: 1mm/pulse (Amplitude: 10Vp-p)
Output signal	analog : SIN/COS 1Vp-p digital : 5V RS422/TTL 24V/PP
Max travel speed	analog : 10m/sec digital : 5m/sec (5V RS422/TTL) 2m/sec (24V/PP)
Input power	5VDC +/-5% 24VDC +/-10%
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67

## 4.2 Ordering Code:

PM - B - XX - XX - V - XX

PM : Positioning Measurement

0 : standard

1 : with metal

1. analog : 1Vp-p 1mm

digital : 5V RS422 1um

3. digital 24V/PP 1um

for the other resolution require ,please contact HIWIN

V : Vertical type

A : Analog SIN/COS 1Vp-p

D : Digital 5V RS422/TTL

0 : Flying Lead

1 : SCSI 20 Pin

2 : SCSI 14 Pin

3 : D-sub 15 Pin

4 : 17 Pin Circular Plug (M17)

5 : SCSI 14 Pin (with screw)


6 : D-sub VGA 15 Pin

Note: Refer to Page 12 for wiring

XX : Cable length (Unit: m ; Max 10m)


B : Pole pitch (1mm)

## 4.3 Dimensions:

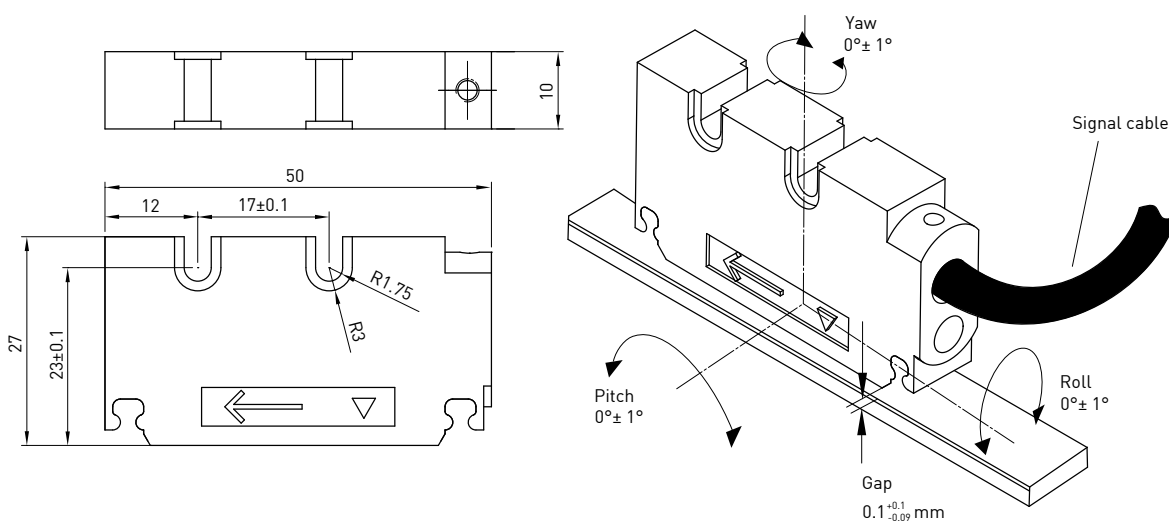

Unit: mm

## 5. Positioning Measurement - PG Type

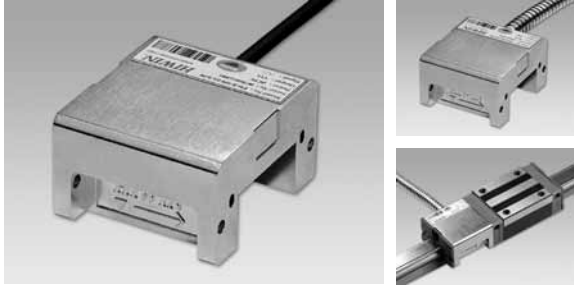

### Features:

- Digital or analog signal output available
- Compact design and compatible with HIWIN linear guideways
- Cost-effective and reliable
- Optimal solution for automation equipment that requires precise position feedback


### 5.1 Specifications:

Signal resolution	analog: 1mm digital: 1μm
Repeatability	analog: ±3μm digital: ±2μm
Reference signal	1mm/pulse
Output signal	analog: SIN/COS 1Vp-p digital: 5V RS422/TTL
Max travel speed	analog: 10m/sec digital: 5m/sec
Input power	5VDC ±5%
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67


### 5.2 Ordering Code:

PM - B - XX - XX - G - XX - XX	PM : Positioning Measurement
	10 : standard
	11 : with metal tube
	XX : for Hxx type (H20, H25 available)
	G : PG type
	A : Analog SIN/COS 1Vp-p
	D : Digital 5V RS422/TTL
	0 : Flying Lead
	1 : SCSI 20 Pin
	2 : SCSI 14 Pin
	3 : D-sub 15 Pin
	4 : 17 Pin Circular Plug (M17)
	5 : SCSI 14 Pin (with screw)
	6 : D-sub VGA 15 Pin
	Note: Refer to Page 12 for wiring
	XX : Cable length (Unit: m ; Max 10m)
	B : Pole pitch (1mm)


### 5.3 Dimensions:

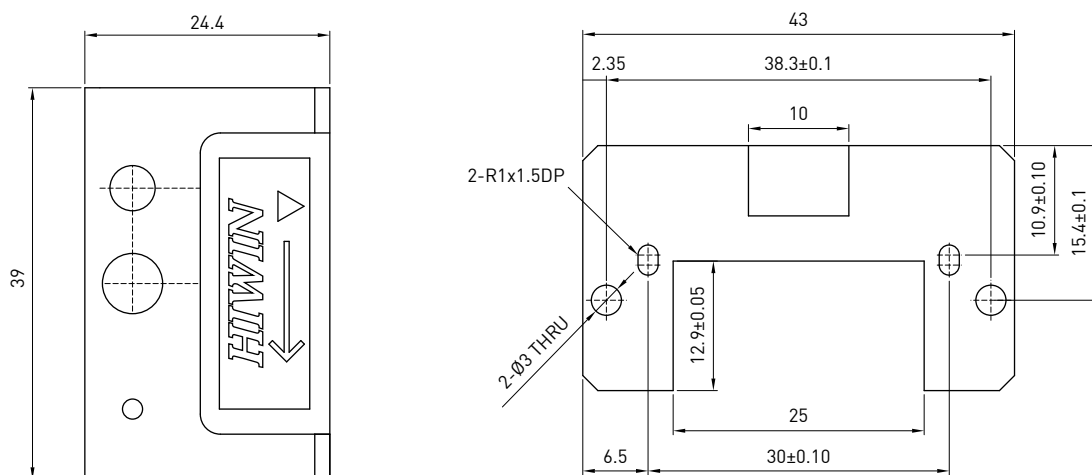

Note: These dimensions are applicable for the Hiwin PGH20 linear guideway

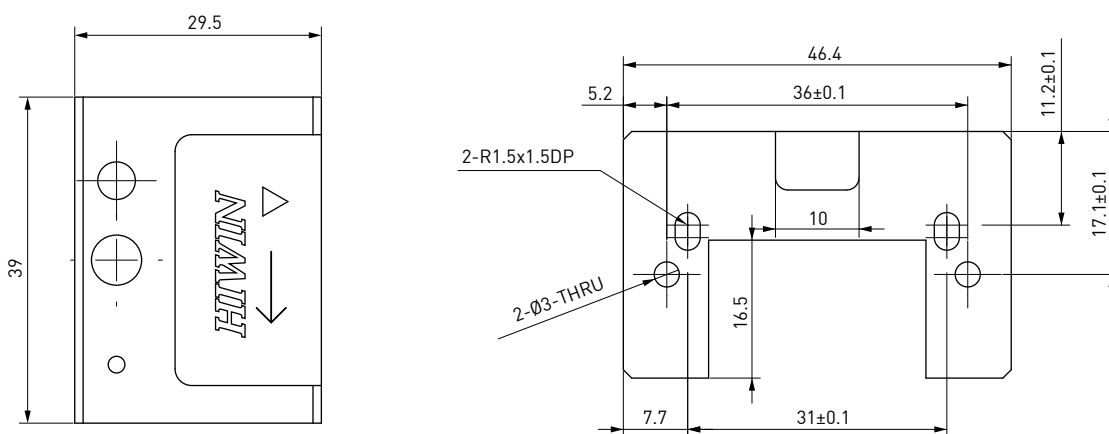

Note: These dimensions are applicable for the Hiwin PGH25 linear guideway

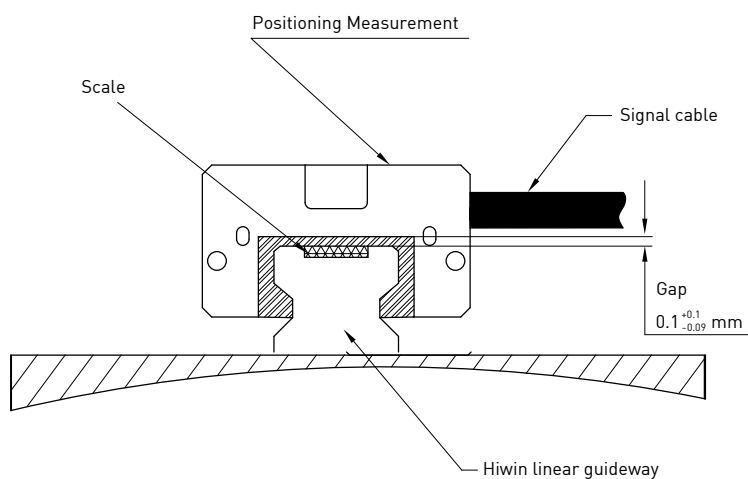

Unit: mm

## 6. 1mm Signal Translator




### Features:

- Converting an analog signal input into a digital signal output
- Output signal 5V RS422/TTL
- Suitable for precise position feedback to a PC or PLC connection


### 6.1 Specifications:

Repeatability	±3μm
Resolution	1μm, 2μm, 5μm, 10μm
Input signal	analog: SIN/COS 1Vp-p
Output signal	digital: 5V RS422/TTL
Max output frequency	1.25MHz (Resolution: 1μm mode)
Power input	5VDC ±5%/0.5A
Max travel speed	5m/sec
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP43

### 6.2 Ordering Code:

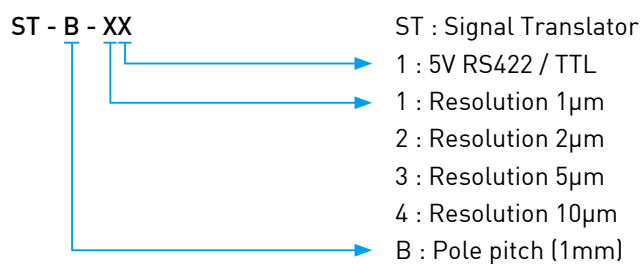

### 6.3 Dimensions:

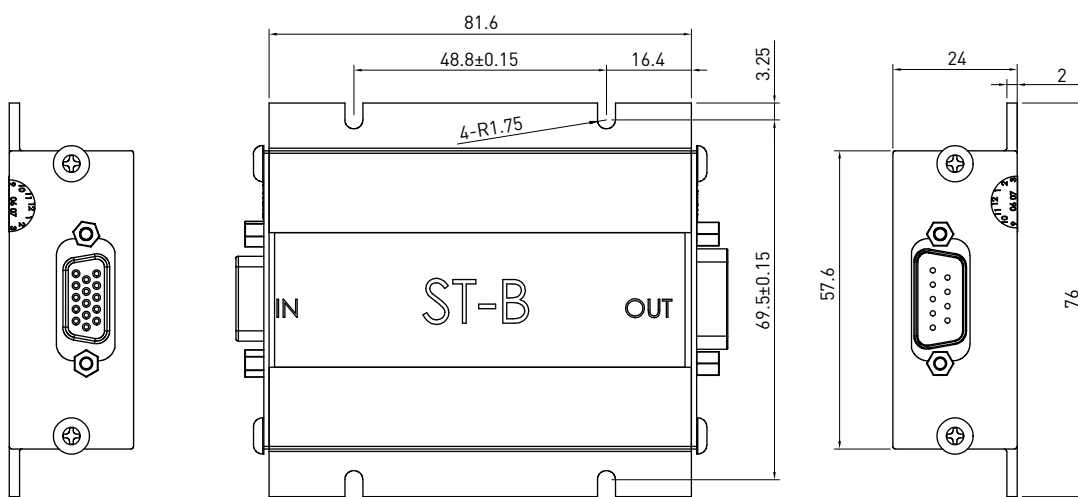

Unit: mm

## 7. Cable Color and Pin Assignment

Function	Signal		Color	Connector (male) (SCSI 14 Pin)	Connector (male) (SCSI 20 Pin)		Connector (male) (D-sub 15 Pin)		Connector (male) (17 Pin Circular Plug)	Connector (male) (D-sub VGA 15 Pin)		Connector (male) (D-sub 9 Pin)	Flying Lead
	Analog	Digital		Analog	Analog	Digital	Analog	Digital		Analog	Digital	Digital	
Power	5V		Brown	1	3	3	4	7	4/5	1	1	2	Brown
	0V		White	8	2	2	12	2	12/13	2	2	1	White
Incremental signals	SIN+	A+	Green	10	16	4	9	14	9	11	3	3	Green
	SIN-	A-	Yellow	11	17	5	1	6	1	12	9	8	Yellow
	COS+	B+	Blue	3	18	6	10	13	10	13	4	4	Blue
	COS-	B-	Red	4	19	7	2	5	2	14	10	7	Red
Reference mark	REF+	Z+	Violet	5	8	8	3	12	3	7	7	5	Violet
	REF-	Z-	Gray	6	9	9	11	4	11	8	8	9	Gray
Shield				case	1/case		case		case	case		case	

Note: 17 pin circular plug

Brand: Intercontec Corp.


P/N: AKUA874MR1087004A000

Function	Signal	Color	Connector(male) (D-sub 9 Pin)	Flying Lead
	Digital		Digital	
Power	24V	Brown	2	Brown
	0V	White	1	White
Incremental signals	A+(PP)	Green	3	Green
	A-(PP)	Yellow	8	Yellow
	B+(PP)	Blue	4	Blue
	B-(PP)	Red	7	Red
Reference mark	Z+(PP)	Violet	5	Violet
	Z-(PP)	Gray	9	Gray
Shield			case	




## 8. Output Signal Definition

### 8.1 Analog Signal Definition:

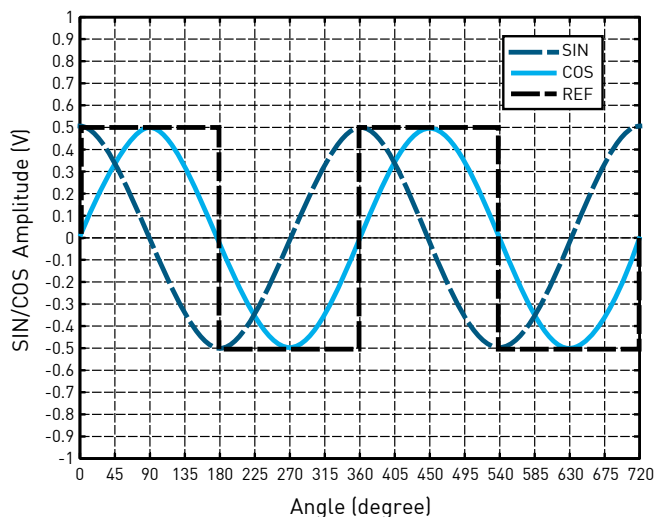


Analog output : Sin/Cos 0.9~1.1Vp-p  
Reference output:1Vp-p ( For T type,PG type, S type )




SIN Wave ahead of COS Wave    Sensor Position

Recommended input circuit of the following electronic device:

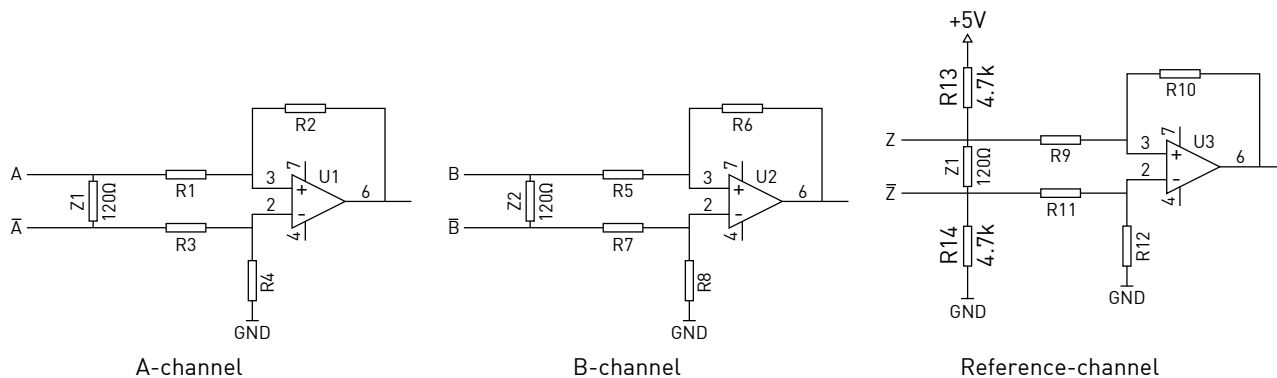

Analog Output


## 8.2 Digital Signal Definition:

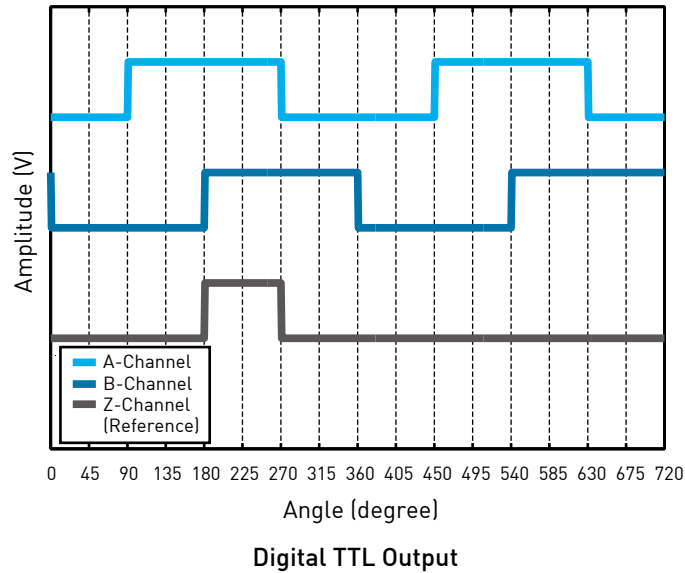

Digital TTL output according to RS422:

- 90° Phase shifted square signal in compliance with RS422 specification
- Recommended termination  $Z=120\ \text{Ohm}$
- Differential output signal  $A, \bar{A}, B, \bar{B}, Z, \bar{Z}$

Recommended input circuit of the following electronic device:

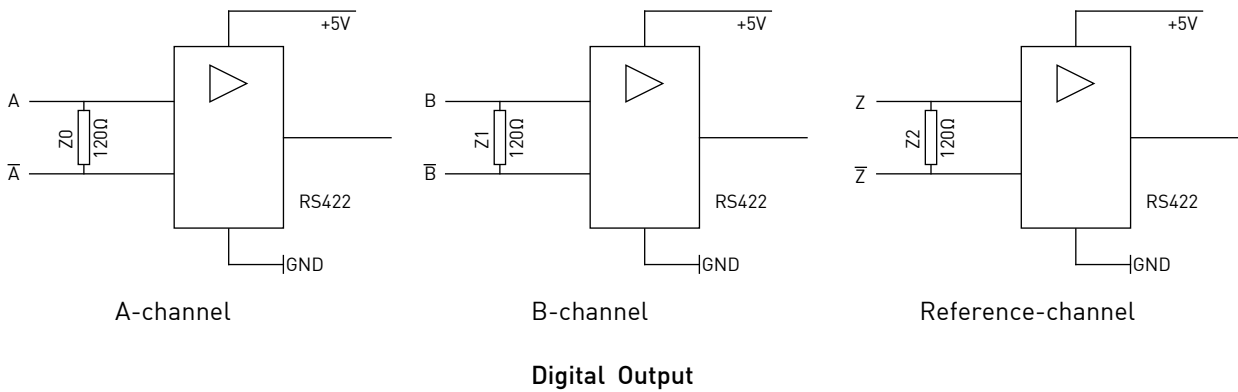


## 9. Signal Translator Pin Assignment

### Output Signal and Application:


ST-B-□1: D-sub 9 pin definition for signal output connector

Pin No.	Signal	I/O
1	GND	I
2	DC5V	I
3	A	O
8	$\bar{A}$	O
4	B	O
7	$\bar{B}$	O
5	Z	O
9	$\bar{Z}$	O
6	SGND	I




### Application Example:

ST-B-□1(5V RS422/TTL) Wiring

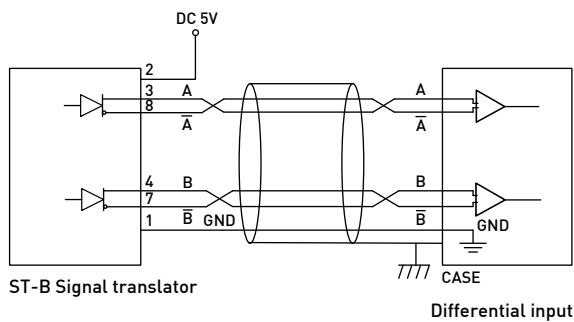

## II. 5mm High Resolution Position Measurement System

### 10. 5mm Positioning Scale

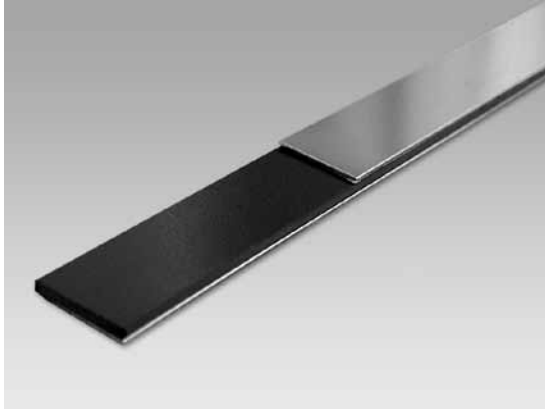


#### Features:

- Compatible with various measurement instruments to achieve different accuracy requirements.
- Magnetic scale can maintain performance under severe ambient conditions caused by oil, water or dust to gain required accuracy and signal feedback.


#### 10.1 Specifications:

Accuracy	$\pm (80\mu\text{m}+15\mu\text{m}/\text{m}\times\text{L})$ L: Length (unit: m)
Pitch	5mm
Width	10mm (+0.2mm~0mm)
Thickness	1.9mm $\pm$ 0.1mm
Max scale length	30m
Linear expansion coefficient	$(11\pm 1) \times 10^{-6}$ m/K
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67

#### 10.2 Ordering Code:



#### 10.3 Dimensions:

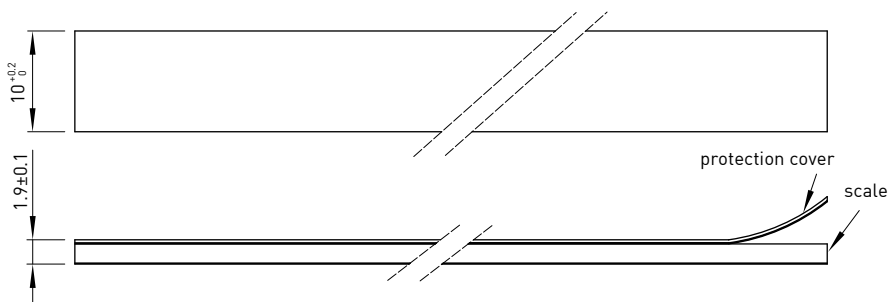


Unit: mm



#### Caution!

1. Magnetic scale consists of magnetic substance and should be kept away from strong magnetic field during installation to prevent a malfunction.
2. Please leave the magnetic field strength 5000 gauss at least 5cm away, to prevent the position measurement system from disruption.

## 11. Positioning Measurement - Vertical Type

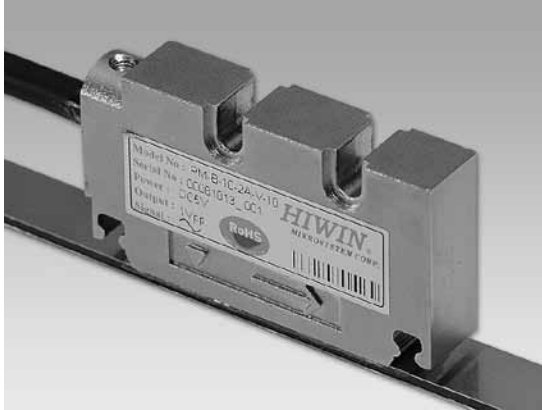


### Features:

- Digital or Analog signal output available
- Vertical shape, optimal for space-saving applications
- Optional metal protection tube and scraper available


### 11.1 Specifications:

Signal resolution	digital: 5µm/10µm
Repeatability	digital: ±10µm/±20µm
Reference signal	digital: 5mm/pulse
Output signal	digital : 5V RS422/TTL 24V/PP
Max travel speed	digital : 5m/sec (5V RS422/TTL) 8m/sec (24V/PP)
Input power	5VDC ±5% 24VDC ±10%
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67

## 11.2 Ordering code:

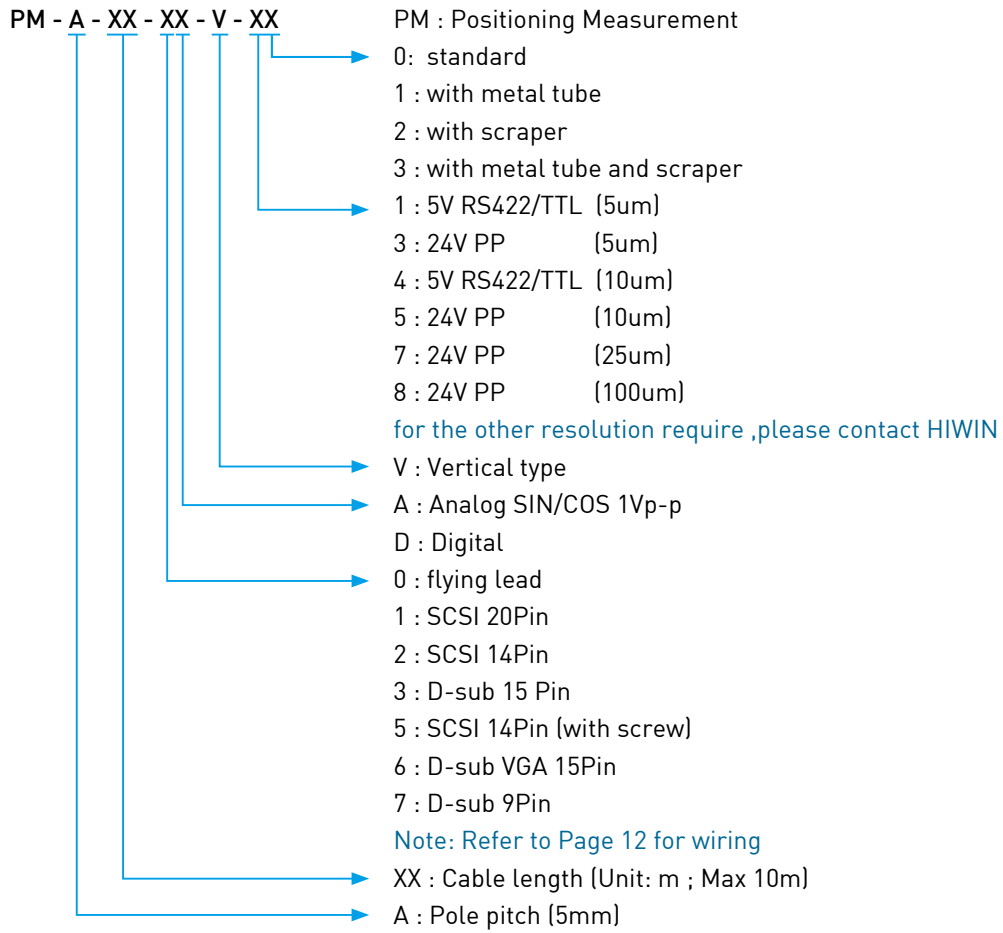


### 11.3 Dimensions:

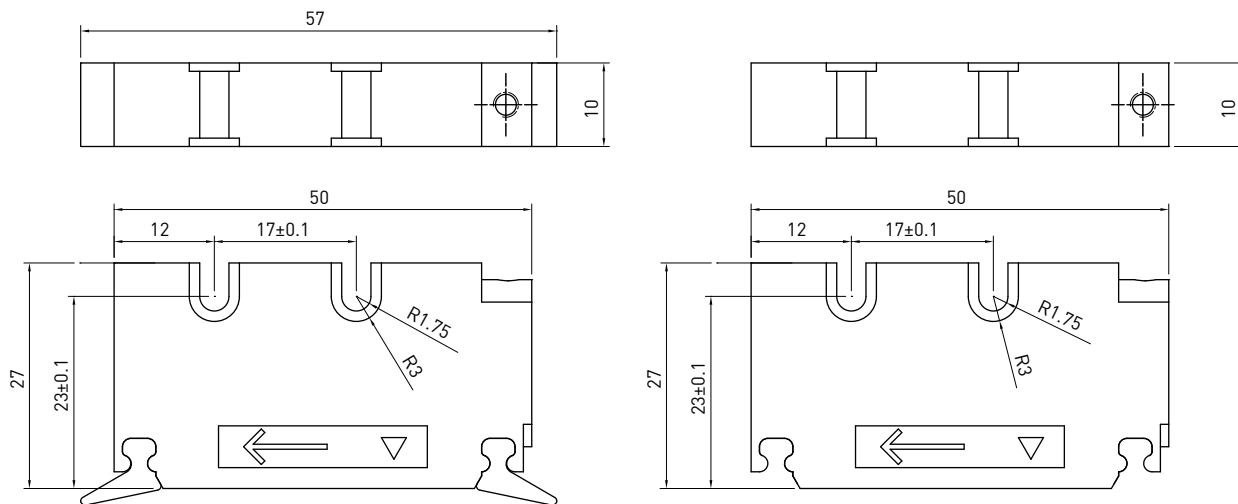

Read head with scraper

Standard read head

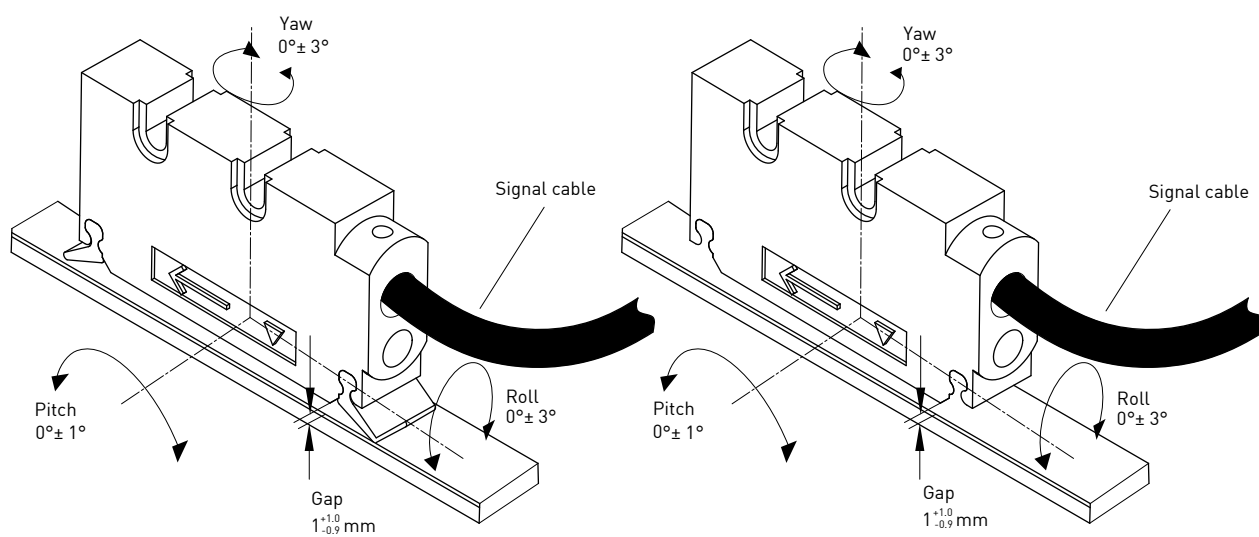

Unit: mm

## 12. Positioning Measurement - E Type




### Features:

- Analog signal output
- Optimal for space-saving applications
- Dustproof and waterproof, up to IP67 protection class

### 12.1 Specifications:



Signal resolution	analog :5mm
Repeatability	±10µm
Output signal	analog: SIN/COS 50mVp-p
Max travel speed	10m/sec
Input power	3.3VDC ±5%
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67

### 12.2 Ordering Code:

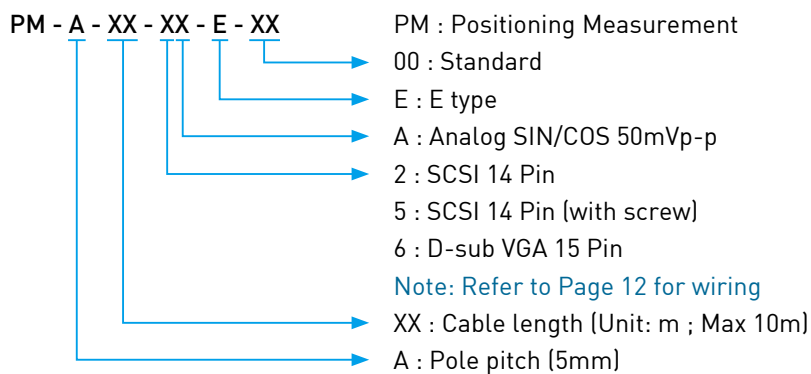



### 12.3 Dimensions:

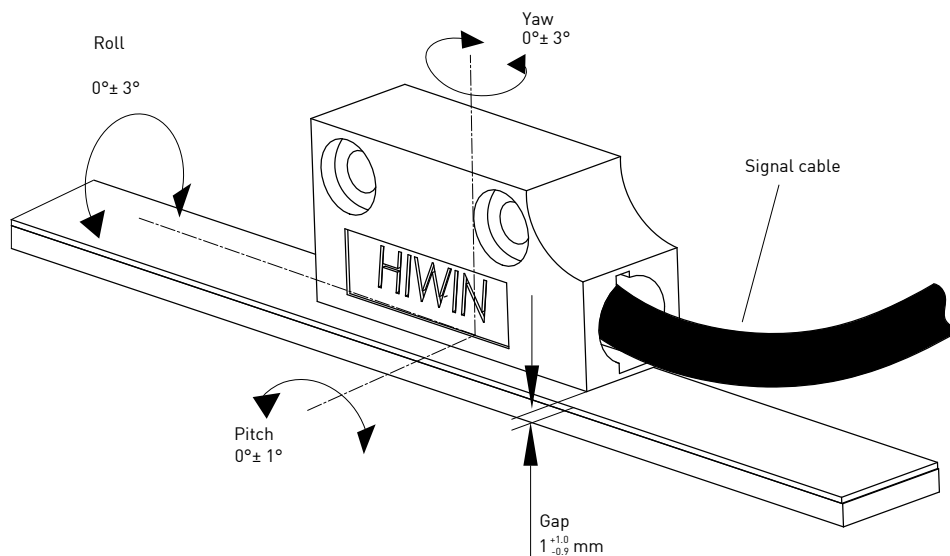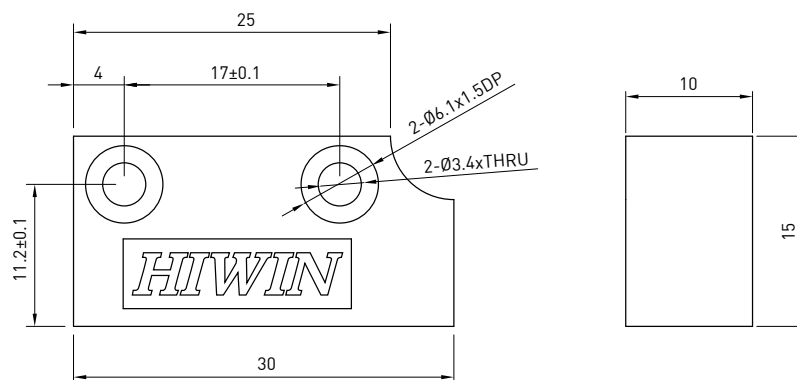

Unit: mm

## 13. Positioning Measurement - H Type




### Features:

- Analog signal output
- Compact design used with Hiwin linear guideways
- Optimal for space-saving applications
- Easy installation

### 13.1 Specifications:

Signal resolution	analog: 5mm
Repeatability	±10µm
Output signal	analog: SIN/COS 50mVp-p
Max travel speed	10m/sec
Input power	3.3VDC ± 5%
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP67

### 13.2 Ordering Code:

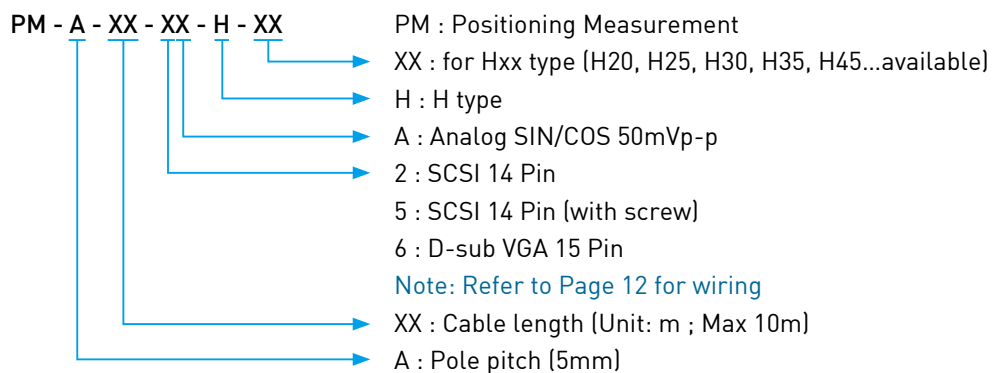

## 14. 5mm Signal Translator



ST-A-□□


### Features:

- Converting an analog signal input into a digital signal output
- Output signal 5V RS422/TTL or open collector
- Suitable for precise position feedback to a PC or PLC connection


### 14.1 Specifications:

Type	ST-A-□□
Repeatability	±10μm
Signal resolution	5 or 10μm
Output pulse signal	5V RS422/TTL 24V open collector
Max output frequency	64KHz/32KHz (Resolution: 5/10μm mode)
Power input	5VDC ± 5% / 0.5A
Max travel speed	5V/TTL 1.2m/sec 24V/O.C 1.2m/sec
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP43

### 14.2 Ordering Code:

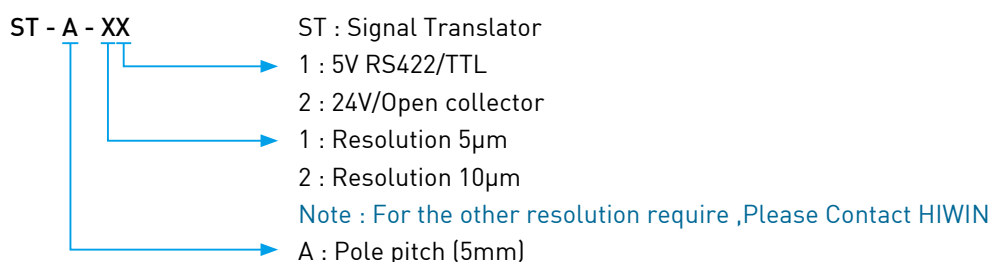

### 14.3 Dimensions:

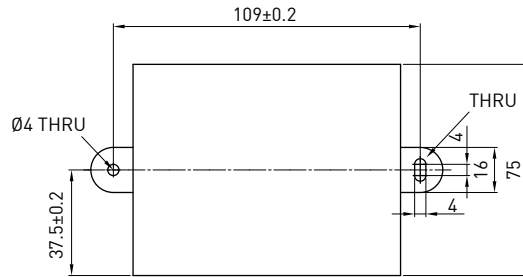


Unit: mm

Note: These dimensions are applicable for ST-A-□□

## 15. Output Signal and Application


ST-A-□1 : D-sub 9 pin definition for signal output connector

Pin No.	Signal	I/O
1	GND	I
2	DC5V	I
3	A	O
8	$\bar{A}$	O
4	B	O
7	$\bar{B}$	O
6	SGND	I




ST-A-□2 : D-sub 9 pin definition for signal output connector

Pin No.	Signal	I/O
1	GND	I
2	DC24V	I
8	A (open collector)	O
7	B (open collector)	O
3	A (TTL level)	O
4	B (TTL level)	O
6	SGND	I

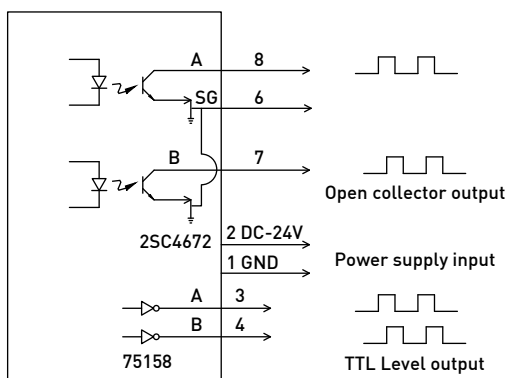


### Application:

ST-A-□1 Wiring

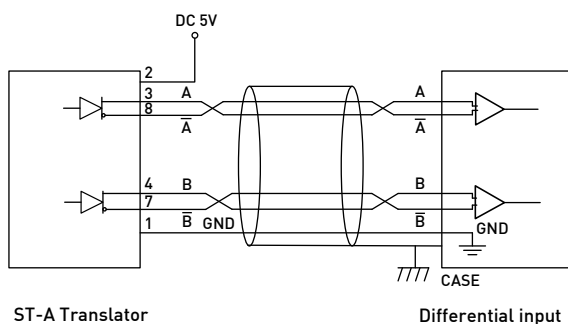

ST-A-□2 Wiring

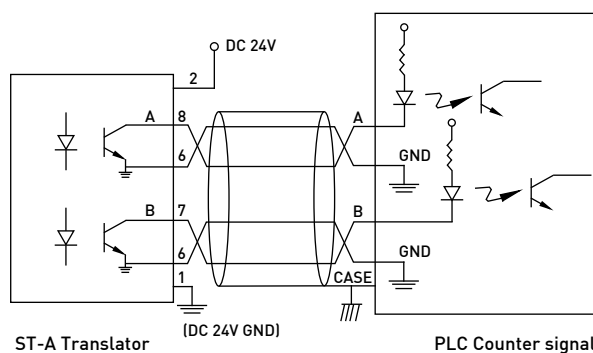

## III. Display and Counter

### 16. LCD Counter System



#### Features:

- LCD display using 2 AA batteries
- Embedded read head, suitable for cutting and wood-processing machines
- Memory mode available
- Compact and cost-effective

#### 16.1 Specifications:

Display	8 digit LCD display with +/- sign
Resolution	5 $\mu$ m
Accuracy	$\pm(80\mu\text{m}+15\mu\text{m}/\text{mxL})$ L: Length (unit: m)
Repeatability	$\pm 10\mu\text{m}$
Operation speed	3m/sec (max 2G acceleration)
Input power	commercial AA No. 3 battery x 2
Battery life	1 year by setting it at 1.5m/s
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	positioning measurement IP67 display IP43

#### 16.2 Functions:


- Set reading direction
- Metric/English measurement
- Angle measurement (the smallest radius is 50mm)
- Set resolution
- 5 sets of independent incremental counters for relative positioning
- Set reference point
- Indicate gap of adjustment
- Save parameter-setting
- Lock keypad
- Indicate location of decimal point
- Measure absolute and relative position
- Programmable reference point compensation; 5 sets
- Maximal velocity setting (default : 1.5 m/s); 5 sets
- Set programmable coefficient ratio
- Indicate and monitor available power capacity
- Set programmable radius

### 16.3 Ordering Code:

PMLD - A - XX - X - XX

- 00 : standard
- XX : For HXX type (H20, H25, H30, H35, H45...available)
- E : for E type positioning Measurement
- H : for H type positioning Measurement
- XX : Cable length (Unit: m ; Max 3m)
- A : Pole pitch (5mm)

### 16.4 Dimensions:

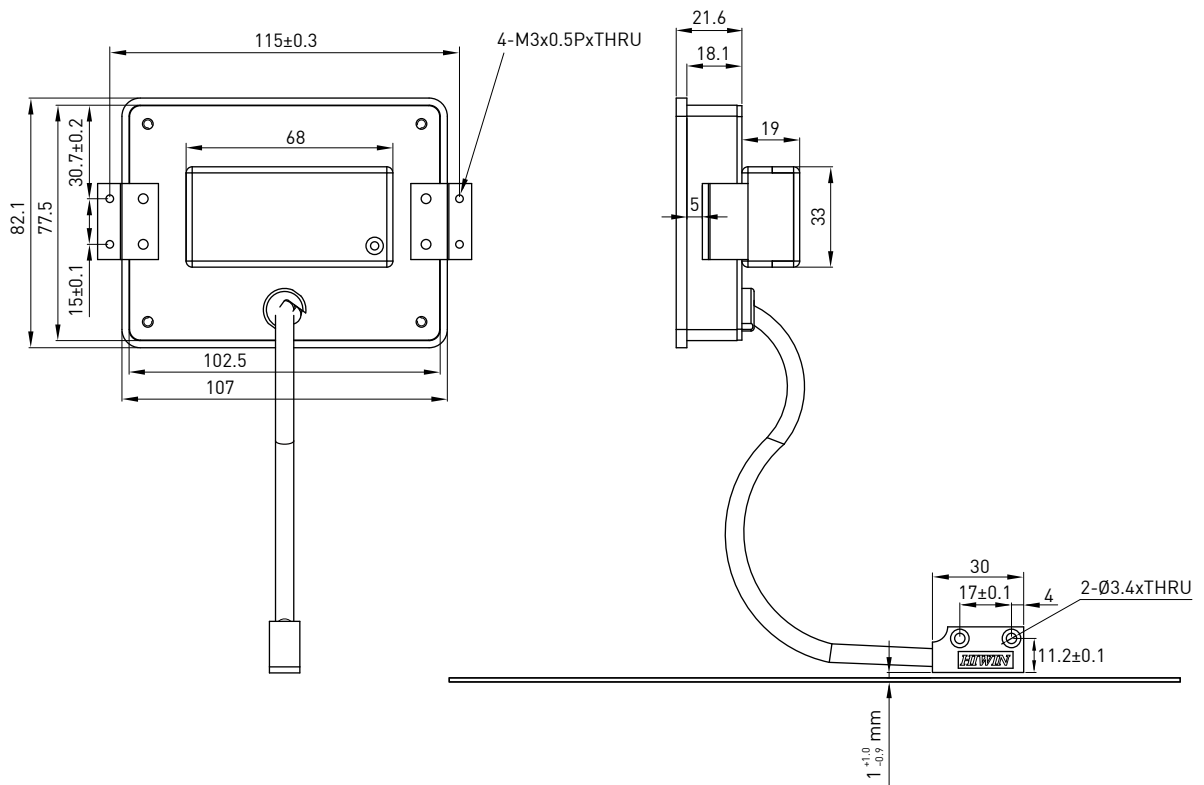

Unit: mm

## 17. High Efficiency Single Axis Counter



### Features:

- LED display
- Can be used with other digital optical encoders
- Consists of multiple output interfaces
- Suitable for cutting and wood-processing machines
- Compact design and easy installation

### 17.1 Specifications:

Display	8 digit LED display
Resolution	1μm, 2μm, 5μm, 10μm
Input signal	analog : SIN/COS 1Vp-p; speed 2m/sec, 2KHz digital : 5V RS422/TTL; speed 2m/sec, 0.5MHz
Input power	DC 5V ± 5% 1A (AC100 ~ 240V/ DC 5V )
Relay contact rating	DC 24V/2A
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP43

### 17.2 Functions:

- Zero and auto-center (1/2) function
- Incremental / absolute switch over
- mm / inch switch over
- Optional resolution: 1μm, 2μm, 5μm, 10μm
- Preset function; 8 sets
- Relay output function; 4 sets
- Current value read will be automatically saved during a temporary power failure
- RS-232 output (optional)




### 17.3 Ordering Code:

PMED - H1 - 1 - XX - X


- 0 : with I/O without RS-232
- 1 : with I/O with RS-232
- 2 : without I/O without RS-232 (Standard)
- 3 : without I/O with RS-232
- 00 : for HIWIN 1mm positioning measurement system (analog/digital)
- A1 : for HIWIN 5mm E type or H type positioning measurement
- 1 : 1 axis display
- H1 : H1 display

### 17.4 Dimensions:

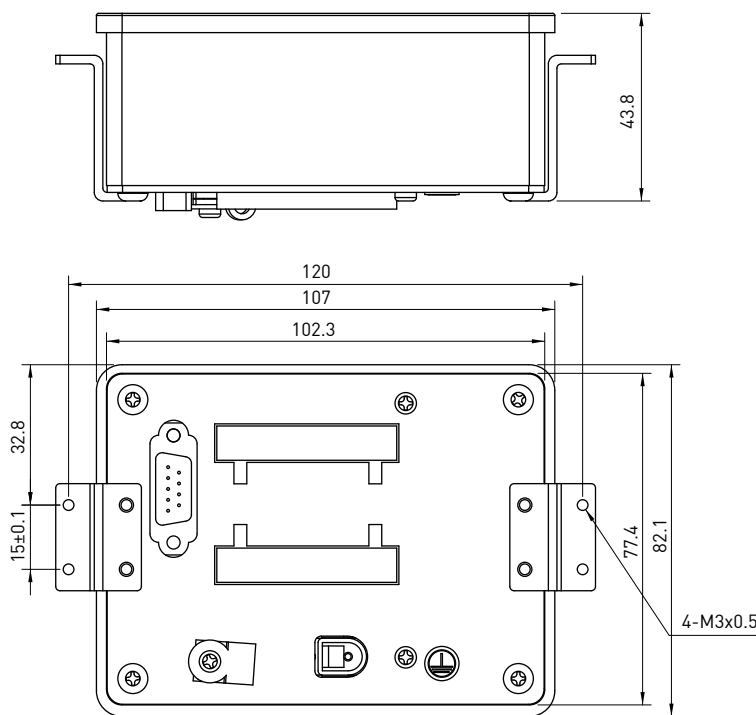


Unit: mm

### 17.5 Description of Input Signal:



Pin	Designation	Pin	Designation	Pin	Designation
1	+5V	6	NC	11	SIN+
2	GND	7	Z+	12	SIN-
3	A+(Digital)	8	Z-	13	COS+
4	B+(Digital)	9	A-(Digital)	14	COS-
5	NC	10	B-(Digital)	15	NC

### 17.6 Description of Relay Output Signal:

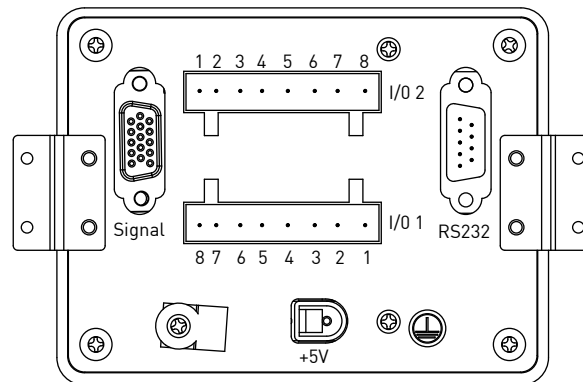

I/O 1		I/O 2	
Pin	Designation	Pin	Designation
1	NC	1	NC
2			
3			
4			
5	Relay 0(CH-0)	5	Relay 2(CH-2)
6			
7	Relay 1(CH-1)	7	Relay 3(CH-3)
8			

## 18. Multi-axis Counter



### Features:

- LED display, high brightness
- Easy operation, suitable for cutting machines, traditional gantry milling machines, and programmable drilling machines
- Compact design and easy installation


### 18.1 Specifications:

Display	8 digit LED display
Resolution	0.1μm, 0.2μm, 0.5μm, 1μm, 2μm, 5μm, 10μm, 20μm, 50μm
Frequency	< 1.5MHz
Input signal	digital: 5V/TTL
Input power	DC 8V~30V / 0.08A
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP43

### 18.2 Functions:


- Zero and auto-center (1/2) function
- mm / inch switch over
- Radius / diameter switch over
- Encoder (ENCODE): 1°~ 0.0001°
- Linear and non-linear mechanical error compensation
- Current value read will be automatically saved during a temporary power failure
- RS232 output (optional)
- Optional resolution : 0.1μm, 0.2μm, 0.5μm, 1μm, 2μm, 5μm, 10μm, 20μm, 50μm, 100μm, 200μm, 500μm, 1mm, 5mm, 10mm

### 18.3 Ordering Code:

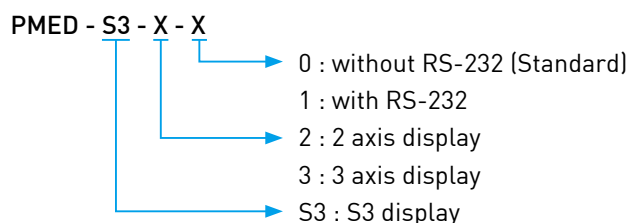



## 19. High Efficiency Multi-axis Counter

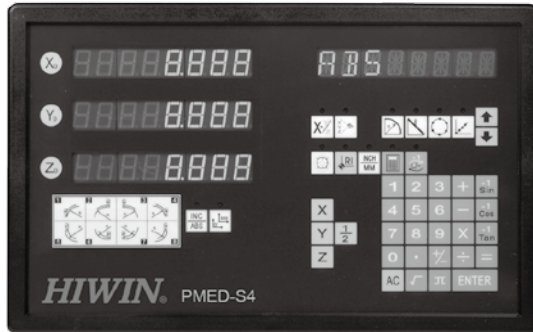

### Features:

- LED display
- Suitable for CNC machine centers, gantry machine centers, milling machines and drilling machines
- Easy operation and installation


### 19.1 Specifications:

Display	8 digit LED display
Resolution	0.1μm, 0.2μm, 0.5μm, 1μm, 2μm, 5μm, 10μm, 20μm, 50μm
Frequency	< 2MHz
Input signal	digital: 5V/TTL
Input power	AC 90V~240V
Operating temperature	0°C~50°C
Storage temperature	-5°C~70°C
Protection class	IP43

### 19.2 Functions:

- Zero and auto-center (1/2) function
- Radius / diameter switch over
- Incremental / absolute switch over
- 1000 sets of coordinate storage
- Peak rate and numeration
- Linear error compensation
- Slope manipulation
- Circular-arc manipulation
- Optional resolution: 0.1μm, 0.2μm, 0.5μm, 1μm, 2μm, 5μm, 10μm, 20μm, 50μm, 100μm, 200μm, 500μm, 1mm, 5mm, 10mm
- Multiple machining functions: Bolt circle machining, R-angle, divide holes on an oblique line, machining on an oblique line
- RS232 output (optional)

### 19.3 Ordering Code:

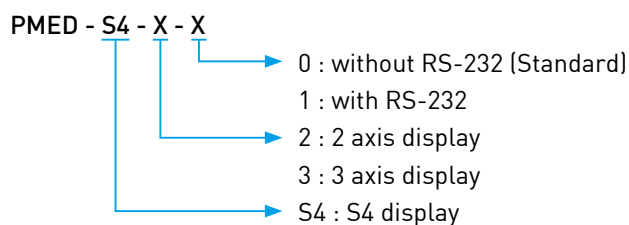



## IV. Accessories

### 20. Signal Transfer Cable

Signal transfer cable for alternative display devices



#### 21.1 Ordering Code:

STC - XX - XX - X      STC: Signal Transfer Cable

- 0 : standard type
- 1 : with metal tube
- 00 : D-sub VGA 15 Pin (for Hiwin display)
- 02: flying lead
- 01 : cable length 1m
- 02 : cable length 2m

### 21. Positioning Scale Installation Fixture

Allows for easy installation and ensures that the scale is parallel to the measurement sensor throughout the entire stroke



#### 22.1 Ordering Code:

PST - 01      PST : Positioning Scale Installation Fixture

- 02 : for Tiny Type positioning measurement
- 03 : for Vertical type positioning measurement
- 04 : for standard type positioning measurement

### 22. Lateral Fixture

Used to mark the end of the scale



#### 23.1 Ordering Code:

PSF - 01      PSF : Positioning Scale Fixture

- 01 : standard type

# V. Customer's Requirements(PM)

Date:

Company name				Contact person				
Tel		Fax		Title				
Specifications Requirements for positioning measurement encoders	Accuracy (μm)		Notes					
	Resolution (μm)							
	Repeatability (μm)							
	Max. speed (m/min)							
	Input voltage (V)							
	Output signal							
	Operating Temperature (°C)							
	Protection level							
Specifications Requirements for signal transistors	Input voltage (V)							
	Output format							
Specifications Requirements for displays	Display axes							
	Display digits							
	Input voltage (V)							
	Operating speed (m/min)							
Budget								
Quantity								
Recommended specification :								
Proponent :								

Manager :


Head :

Applicant :







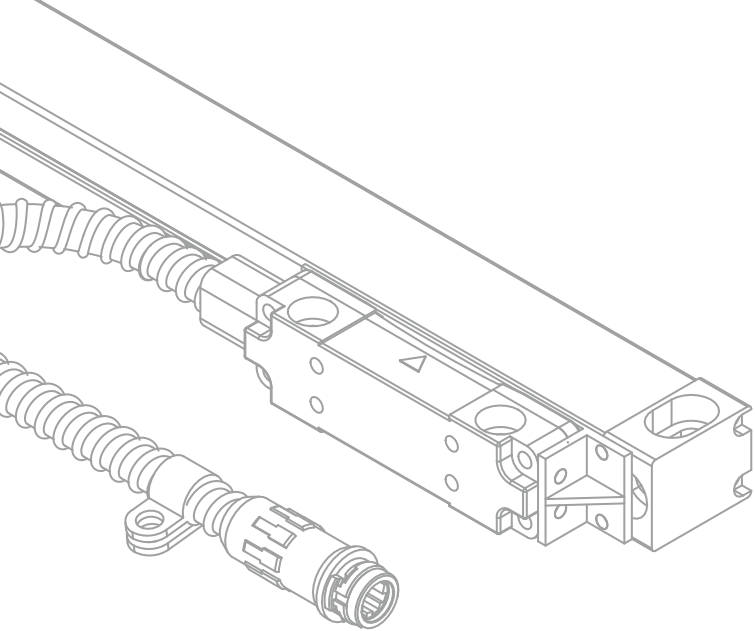

# HIWIN®

Motion Control and System Technology



## HIWIN MIKROSYSTEM CORP.

No.6, Jingke Central Rd.,  
Taichung Precision Machinery Park,  
Taichung 40852, Taiwan  
Tel: +886-4-23550110  
Fax: +886-4-23550123  
[www.hiwinmikro.com.tw](http://www.hiwinmikro.com.tw)  
[business@hiwinmikro.com.tw](mailto:business@hiwinmikro.com.tw)

## Subsidiaries & RD Centers

**HIWIN GmbH**  
OFFENBURG, GERMANY  
[www.hiwin.de](http://www.hiwin.de)  
[www.hiwin.eu](http://www.hiwin.eu)  
[info@hiwin.de](mailto:info@hiwin.de)

**HIWIN JAPAN**  
KOBE · TOKYO · NAGOYA · KUMAMOTO,  
JAPAN  
[www.hiwin.co.jp](http://www.hiwin.co.jp)  
[info@hiwin.co.jp](mailto:info@hiwin.co.jp)

**HIWIN USA**  
CHICAGO · SILICON VALLEY, U.S.A.  
[www.hiwin.com](http://www.hiwin.com)  
[info@hiwin.com](mailto:info@hiwin.com)

**HIWIN s.r.o.**  
BRNO, CZECH REPUBLIC  
[www.hiwin.cz](http://www.hiwin.cz)  
[info@hiwin.cz](mailto:info@hiwin.cz)

**HIWIN SCHWEIZ**  
JONA, SWITZERLAND  
[www.hiwin.ch](http://www.hiwin.ch)  
[info@hiwin.ch](mailto:info@hiwin.ch)

**HIWIN FRANCE**  
L'AIGLE Cedex, FRANCE  
[www.hiwin.fr](http://www.hiwin.fr)  
[info@hiwin.fr](mailto:info@hiwin.fr)

**HIWIN Srl**  
Rho (MI), ITALY  
[www.hiwin.it](http://www.hiwin.it)  
[info@hiwin.it](mailto:info@hiwin.it)

**Mega-Fabs Motion System, Ltd.**  
YOKNEAM, ISRAEL  
[www.mega-fabs.com](http://www.mega-fabs.com)  
[info@mega-fabs.com](mailto:info@mega-fabs.com)